




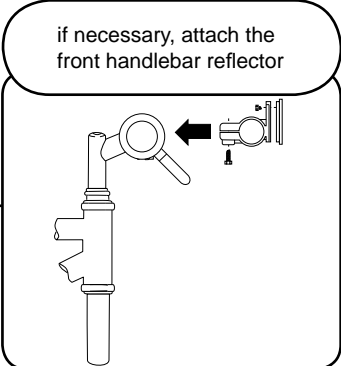
Assembly Instructions


- 1** insert the front wheel into the fork. slide a safety washer onto each axle as shown



- 2** tighten each axle nut securely
*350in-lbs (39.5 Nm)



- 3** close the front brake. check front and rear brakes for proper operation. if they are in need of adjustment refer to the owner's manual

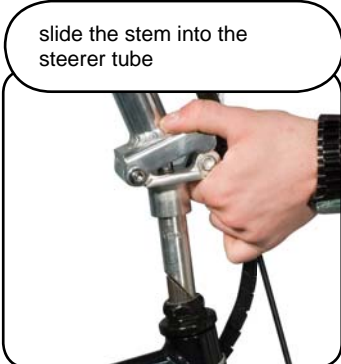

- 4** if necessary, attach the front handlebar reflector



- 5** slide the stem into the steerer tube



- 6** insert the top half of the handlebars into the stem from the previous step. secure the quick release to lock in place!



- 7** align the bars to be perpendicular to the front wheel, then tighten the wedge bolt


- 8** swing the bars upright and close the quick release lever!


- 9** insert the seat post into the seat tube, then close the quick release!


- 10** install the pedals and tighten them (325 in-lbs, 38 Nm). the left side pedal is reverse threaded, the right side is standard


- 11** charge the battery (10 hours initially, then 8-10 hours after each ride)




*see owner's manual for more detailed information on all topics
!refer to owner's manual for proper quick release adjustment





9453 Owensmouth Ave., Chatsworth, CA 91311 USA
Phone: +1 800 377 4532 | Fax: +1 818 734 8199
currietechnology.com | izipusa.com | ezipusa.com
sales@currietechnology.com | sales@izipusa.com


Folding Instructions


- 1 unplug the battery, pull the locking pin (left side), then pull the battery pack out of the frame



- 2 fold the pedals by pushing the black portion towards the frame, then swinging it down. repeat for opposite side


- 3 open the seat post quick release, then lower the saddle completely


- 4 slide the top handlebar section down completely and lock in place

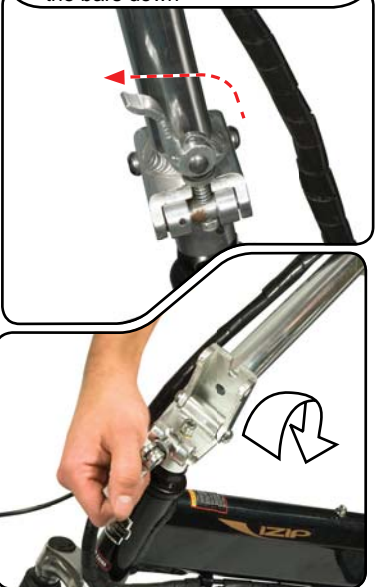
- 5 open the quick release securing the handlebar hinge, then fold the bars down


- 6 open the quick release securing the frame hinge¹, swing back the lever, then lift the pin up to fold the frame



*see owner's manual for more detailed information on all topics
¹refer to owner's manual for proper quick release adjustment